



SHRINK TECH SYSTEMS

www.shrinktechsystems.com

STS SHRINK TUNNEL FEATURES

A "CoolDown" Feature That Automatically Shuts The Systems Off

Lighted Chamber With Viewing Window To Monitor Shrink Performance

Variable Speed Conveyor Control

Hi - Low Speed Fan Controls

Transfer Roller To Bridge Gap Between Sealer & Tunnel

Adjustable Leg Extension With Locking Casters



STS Shrink Tunnels Are Available With Chamber Sizes Ranging From 12" to 20" In Height: 4', 6' & 8' In Length: 17", 22" & 30" In Width.

SYSTEMS SPECIFICATIONS:

Model	System Length	Shrink Chamber Dimensions			Electrical Specifications
		Length	Width	Height	
VST1712/4	72"	48"	19"	12"	Three heaters w/fans, each with individual speed controls, 12KW, 220V, 48amps/1ph, or 28amps/3 ph.
VST2212/4	72"	48"	24"	12"	
VST3012/4	72"	48"	32"	12"	Four heaters system w/fans and controls, 220V, 16KW, 50amps, 3ph
VST1712/6	96"	72"	19"	12"	Six heaters w/fans, each with individual speed controls, 220V, 24KW, 60amps 3ph
VST2212/6	96"	72"	24"	12"	
VST3012/6	96"	72"	32"	12"	
VST1712/8	120"	96"	19"	12"	Six heaters w/fans, each with individual speed controls, 220V, 24KW, 60amps 3ph
VST2212/8	120"	96"	24"	12"	
VST3012/8	120"	96"	32"	12"	


Conveyor Options:

Teflon Mesh Belt
Hard Plastic Mesh Belt

Stainless Steel Belt
Live Roller (Silicone or Optional Teflon Cover)



1226 AMBASSADOR BLVD. SAINT LOUIS, MISSOURI 63132
PHONE: 314.997.4259 FAX: 314.995.7006

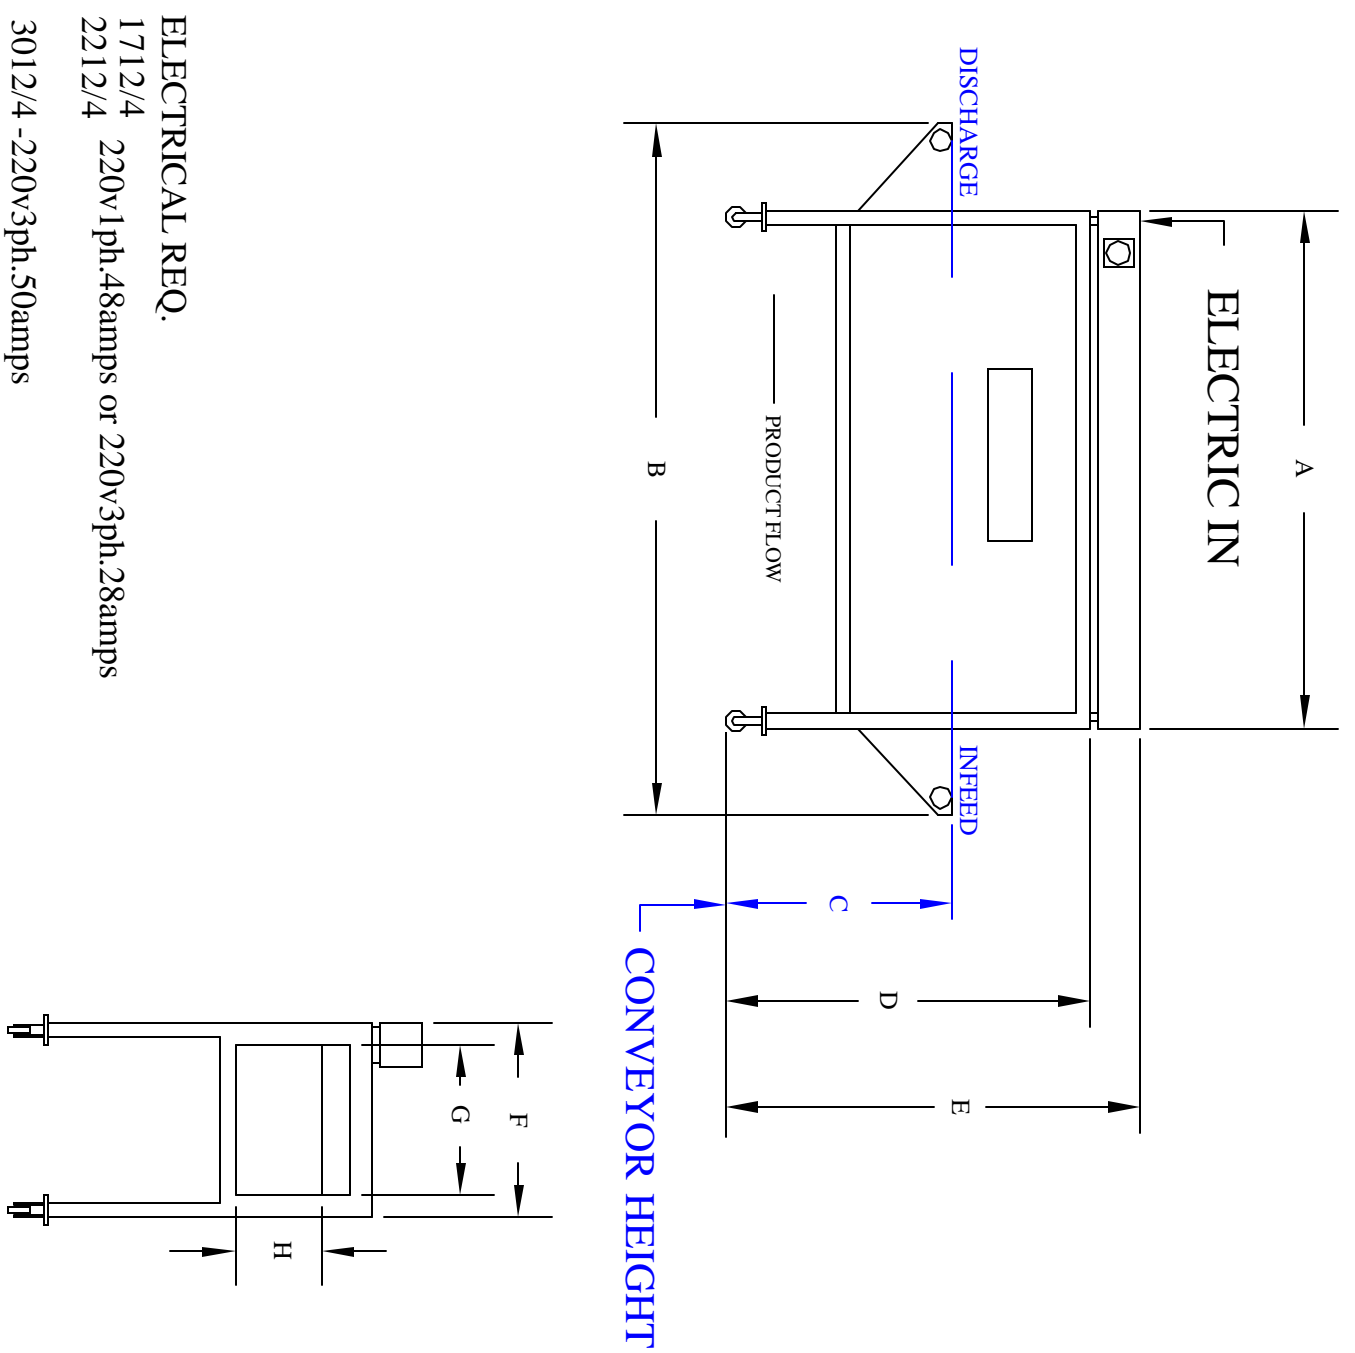

ELECTRICAL REQ.
 1712/4 220v1ph.48amps or 220v3ph.28amps
 2212/4
 3012/4 -220v3ph.50amps

MODEL	A	B	C	D	E	F	G	H
STS 3012/4	48"	72"	35-38"	51"-54"	58"-61"	40"	32"	12"
STS 2212/4	48"	72"	35-38"	51"-54"	58"-61"	32"	25"	12"
STS 1712/4	48"	72"	35-38"	51"-54"	58"-61"	27"	20"	12"

STS SHRINK TECH SYSTEMS L.T.C. 1226 AMBASSADOR DRIVE ST. LOUIS, MO. 63132 PN. 314-997-4259 / FAX 314-995-7006		SCALE: NONE DATE: 6/23/00 DRAWN BY: DARYL F. SHEET NO.: 1 OF 1	TITLE: STS TUNNEL DIMENSIONAL SPECS MODEL: STS 1712/4, 2212/4, 3012/4 PWR. REQ. SEE ELECTRICAL REQ.
---	--	---	---