

LITTLE DAVID 

CASE SEALER LDX-UTB

HIGH PERFORMANCE - UNIFORM CASE SEALING



The Little David® **LDX-UTB** is the latest in a series of industrial grade, high performance case sealers from Little David®.

Constructed of fully welded tubular steel, this top and bottom drive case sealer is optimal for sealing large runs of the same box size at high speeds. Its speed, extensive box range, and instant box changeover with self-centering side rails set it apart from competing machines.



PERFORMANCE & DESIGN FEATURES:

HIGH PERFORMANCE

Case Sealer processes cases between 20%-80% faster than the competition, providing the efficiency you require.

INDUSTRIAL DESIGN

Welded tubular steel construction, reinforced critical stress points and lightweight removable access panels.

USER FRIENDLY

Self-centering side rails and adjustable top drives, including movable magnetic control station with start/e-stop button and interchangeable top and bottom tape cartridge.

QUICK/EASY MAINTENANCE

Easy access motors, electrics, and belts facilitate quick and easy maintenance and repair.

LITTLE DAVID

LDX-UTB

The Little David * LDX-UTB is a semi-automatic case sealer designed for processing large runs of the same size box. The LDX-UTB requires manual adjustments to the top drive (for the height of the box) and side rails (for the width of the box). Cases are top and bottom sealed with 2" or 3" tape using the latest CaseLocker 60 tape cartridges.

LITTLE DAVID * PERFORMANCE & DESIGN FEATURES:


- Processes cases between 20% and 80% faster than the competition
- Movable Control Station
- Easy access motors, electricals and belts
- Interchangeable cartridges (top and bottom)

OPTIONS OF THE LDX-UTB:

- Casters
- Roller Infeed Pack Table
- Roller Exit Pack Table
- Leg Extensions (3)
- High Speed
- CF-5 Connection Kit

CaseLocker™ 60:

This high-performance tape cartridge features tool-less quick release wipe rollers and knife blade, light actuation for weak boxes, tilt back open design for easy tape threading, and is capable running at speeds up to 200 ft./min.



SPECIFICATIONS:

Power Requirements:
110 volts, 60 cycle, single phase

Air Requirements:
N/A

Operating Speed:
Continuous belt drive;
Standard: 115' per minute (35.05 m/min).
High Speed: 155' per minute (47.25 m/min.)

Closure Material:
Pressure Sensitive Tape

Weight:
570 lbs. (258 kg.), uncrated


CASE CAPACITY:

Length: 6" - infinite
Width: 5-1/2" - 26"
Height: *3-1/2" - 24.5"

*Minimum height can be reduced to 2.5" with reduced tape tab length

MACHINE DIMENSIONS:

67-3/8" (170.9cm) high
46-1/4" (127.7cm) long
36-7/8" (93.4cm) wide

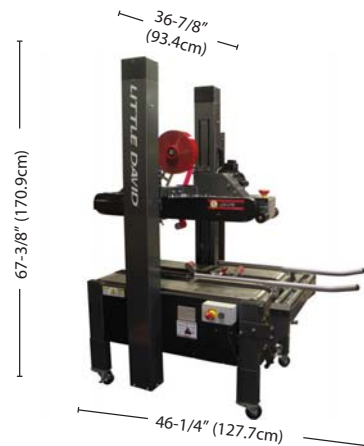

DISTRIBUTED BY:

LOVESHAW

an ITW Company

2206 East Turnpike
P.O. Box 83, South Canaan, PA 18459
Tel: (570) 937-4921 Fax: (570) 937-3229
Toll Free: (800) 572-3434

LOVESHAW Europe

an ITW Company

Unit 9 Brunel Gate
West Portway Industrial Estate
Andover, Hampshire, England SP10 3SL
Tel: (1264) 357511 Fax: (1264) 355963